

# **Product Data Sheet**

# Aspire Interlocking Composite Paver System

### **Description:**

The Aspire Interlocking Composite Paver System consists of 16" x 16" grids with individual pavers that are both made with up to 95% recycled materials. The pavers are one-third the weight of concrete pavers and the patented grid system enables quick and easy installation that is up to 3 times faster than traditional pavers.

### **Benefits:**

- Authentic... looks like real bricks and pavers
- Lightweight and easy to handle
- Cuts easily... No special equipment needed
- Crack, scratch, and stain resistant
- Low maintenance... no sealer needed
- ADA compliant (no gaps > ½")
- Sustainable... made from recycled materials

#### **Uses:**


- Rooftop & Balconies
- Wood Deck & Concrete Resurfacing
- Courtyards, Patios & Pool Decks
- Playgrounds & Parks
- Walkways
- Driveways
- Parking Lots

# **Resurfacing Pavers Specifications**



Paver Sizes(s)	4"x4", 4"x8", 8"x8", 16"x16"	
Grid Size	16"x16"	
Combined Height	1.75"	
Weight (per unit)	12 lbs. (6.74 lbs./sq. ft.)	
Square Feet (per unit)	1.78 sq. ft.	
Accessories	Transition Paver Transition Corner Paver Transition Paver with Legs Bullnose Paver Bullnose Corner Paver Elongated Bullnose Paver	
Pallet Sizes		
Quantity	180 units (approx. 320 sq. ft.)	
Weight	Approx. 2,210 lbs.	



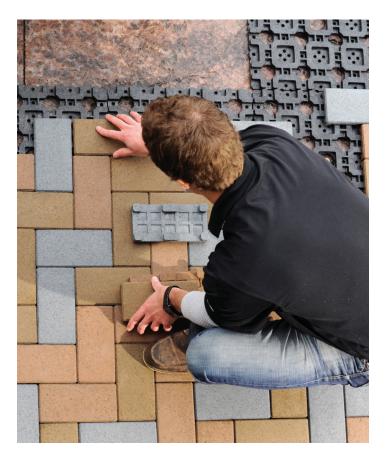



# **Product Data Sheet**

Specification	Test Method	Result
Fire Classification	ASTM E108-007	Class A
2" Hail Impact	UL-2218	Class 4
Compression Strength	ASTM C140-09 Section 7	3521 PSI
Flexural Modulus	ASTM C140-09	3842 PSI
Water Absorption	ASTM C67 Section 8	4.10%
Freeze-Thaw	ASTM C67 Section 9	Pass: No sign of cracking or disintegration
Freeze-Thaw Cycling	ASTM C67	Pass
Specific Gravity	FSBP Test Method	0.9
Coefficient of Friction with Pull Monitor	ASTM C1028-07	Wet: 0.47 Dry: 0.83
Chemical Resistance	ASTM F925	No Dulling, color change, or surface attack

## **Classic Series Color Collection**



# **Designer Series Color Collection**

#### **Earth Collection**





Deep Sea



### **Stone Collection**





#### **Terra Cotta Collection**



Burnt Umber

Red Rock **Beverly Hills** 


Specifications are subject to change without notice. For more information, please call Aspire at (844) 290-4196.

Aspire

## Patterns & Designs

The patented grid system not only takes less time to install than traditional concrete pavers, it makes creating patterns and designs easier than ever. Choose from multiple colors, three paver sizes, and a variety of patterns for a form and function that best suits your project.







Basketweave

**Block Lattice** 

Herringbone



Aspire by Brava 915 E. Tyler Street | Washington, IA 52353 | ©2024 Brava Roof Tile For more information please visit aspirepavers.com or call 844-290-4196 03/24